



IBCTANK CORPORATION

IBC·TANKS·FLEXIBAG·DRUMS





COMPANY ABOUT US

IBC Tank Corporation is a global company specializing in supplying a wide range of industrial packaging containers, including IBC tanks, flexibags, and drums. We provide high-quality products through OEM production at trusted factories in China, and we design customized solutions tailored to each customer's needs, delivering them worldwide.

KEY PRODUCTS AND OUR STRENGTH

IBC TANK

Optimized design for export and import transportation maximizing logistics efficiency

FLEXIBAG

Innovative packaging solutions for bulk liquid transport

DRUM

Combining the durability and safety required by various industries



We do more than simply sell packaging containers. We take the time to thoroughly understand our customers' business environments and requirements to propose customized packaging solutions. This approach helps reduce logistics costs while maximizing product safety and transportation efficiency. With designs optimized for global logistics and transportation, we have established ourselves as a trusted partner across various industries, moving forward as a global leader growing together with our customers.

VISION OUR GOAL

Quality Assurance

All products are manufactured and inspected under strict quality standards


Global Network

Prompt delivery to major markets including Asia, Europe, and North America

Customized Proposals

Professional consulting tailored to the needs of diverse industries

At IBC Tank Corporation, we set a new standard in packaging solutions and will do our utmost to contribute to our customers' success.

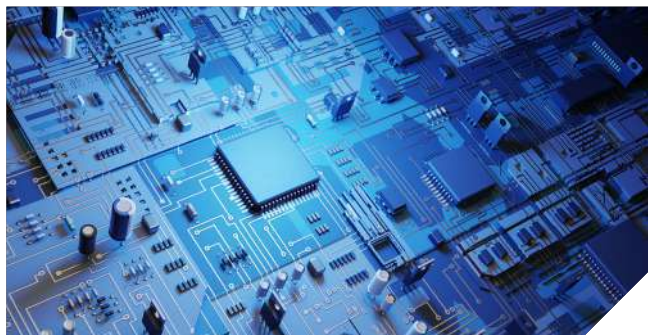

From semiconductors to electronic devices

SEMICONDUCTOR

Our company offers products capable of accommodating materials used in semiconductors, displays, and other electronic components.



Used in petrochemical processes

PETROCHEMICAL

These robust products can also be used in petrochemical applications, providing the advantage of ensuring safe and reliable performance for your business.



Contributing to the food industry

FOOD

Our company also plays a part in the food industry and strives to ensure the safe handling of all materials used in food ingredients and products.



Paints, mixing agents

MIXTURE

We manufacture products that can be used with a wide range of materials, including color paints, mixing agents, abrasives, and other substances.



1. Water Treatment and Environmental Industries

Wastewater treatment, Water purification chemicals
Disinfectants and pH regulators

2. Construction and Manufacturing

Concrete admixtures, Paints and waterproofing agents
Metal coatings and surface treatment chemicals

3. Pulp and Paper Industry

Bleaching agents and pulp chemicals, Paper coating additives
Stabilizers and emulsifiers

4. Oil and Gas Industry

Lubricants, Engine oils, Pipeline protection agents

5. Chemical Industry

Surfactants, Detergents, Organic compounds

6. Secondary Battery Industry

Electrolytes, Cathode/Anode additives, Battery performance enhancers

7. Semiconductor Industry

Etching and cleaning solutions, Ultra-high-purity chemicals, Wafer cleaning agents

8. Display Industry

Liquid crystal (LCD) chemicals, OLED additives
Optical coating agents

9. Electronic Materials Industry

Conductive materials, Chemicals for PCB manufacturing
Reaction catalysts

10. Pharmaceutical Industry

Active pharmaceutical ingredients (APIs), Solvents for injections, Medical disinfectants

11. Food and Beverage Industry

Edible oils and syrups, Beverage additives, Bulk liquid storage

12. Agricultural Industry

Liquid fertilizers, Insecticides and herbicides, Agricultural chemical additives

13. Cosmetics Industry

Skincare and haircare ingredients, Surfactants, Perfume agents



Standard IBC Tank

The most common model, available in a variety of types

Weight	56~60KG
Capacity	1,000 - 1,050L
Dimensions	1000(±5) X 1200(±5) X 1160(±5) (mm)
Permit Approval	Dangerous Goods Container Inspection Certificate
Pallet Types	Steel
Specific Gravity	1.9

Liner Selection

• UV Blocking Ratio Varies



Original Color (White)
[Specific Gravity 1.9]



White(90% UV Protection)
[Specific Gravity 1.5]



Black(90% UV Protection)
[Specific Gravity 1.5]



Blue(70% UV Protection)
[Specific Gravity 1.5]

Caps Sealed & Air Vent Types



150A Sealed Type 225A Sealed Type 350A Sealed Type

• Air vent type available

Accessories Coupling&Camlock



Camlock
Reducer
Coupling

Camlock
Reducer
Coupling

Camlock
Adapter

Camlock
Adapter

Valves Ball & Butterfly



50DN
Ball Valve

50DN
Butterfly Valve

80DN
Butterfly Valve Camlock

50DN
Ball Valve Camlock

3-inch
Butterfly Valve



Anti-Static IBC Tank

Capable of packaging flammable materials with a flash point below 60°C (surface resistance < 10¹⁰Ω)

Weight	56~60KG
Capacity	1,000L / 275gal
Dimensions	1200 X 1000 X 1160 (mm)
Permit Approval	Dangerous Goods Container Inspection Certificate
Pallet Types	Steel
Specific Gravity	1.6

Liner Selection

• UV Blocking Ratio Varies



Basic Model
(Original Color)
[Specific Gravity 1.6]



White(90% UV Protection)
[Specific Gravity 1.5]



Black(90% UV Protection)
[Specific Gravity 1.5]

Caps Sealed & Air Vent Types



150A Sealed Type 225A Sealed Type 350A Sealed Type

• Air vent type available

Accessories Coupling&Camlock



Camlock
Reducer
Coupling

Camlock
Reducer
Coupling

Camlock
Adapter

Camlock
Adapter

Valves Ball & Butterfly



50DN
Ball Valve

50DN
Butterfly Valve

80DN
Butterfly Valve Camlock

50DN
Ball Valve Camlock

3-inch
Butterfly Valve



Explosion-Proof IBC Tank (Product in preparation)

Capable of packaging flammable materials with a flash point below 60°C (surface resistance < 10¹⁰Ω)

Weight	60KG
Capacity	1,000L / 275gal
Dimensions	1200 X 1000 X 1160 (mm)
Permit Approval	Dangerous Goods Container Inspection Certificate
Pallet Types	Steel
Specific Gravity	1.6

Liner Selection

• UV Blocking Ratio Varies



Basic Model
(Original Color)
[Specific Gravity 1.6]



White(90% UV Protection)
[Specific Gravity 1.5]



Black(90% UV Protection)
[Specific Gravity 1.5]

Caps Sealed & Air Vent Types



150A Sealed Type 225A Sealed Type 350A Sealed Type

• Air vent type available

Accessories Coupling&Camlock



Camlock
Reducer
Coupling

Camlock
Reducer
Coupling

Camlock
Adapter

Camlock
Adapter

Valves Ball & Butterfly



50DN
Ball Valve

50DN
Butterfly Valve

80DN
Butterfly Valve Camlock

50DN
Ball Valve Camlock

3-inch
Butterfly Valve



Semi-Finished IBC Tank


The most common model, available in a variety of types

Weight	56~60KG
Capacity	1,000 - 1,050L
Dimensions	1000(±5) X 1200(±5) X 1160(±5) (mm)
Permit Approval	Food Testing Result Certificate
Pallet Types	Steel / Plastic

Liner Selection



Original Color (White)

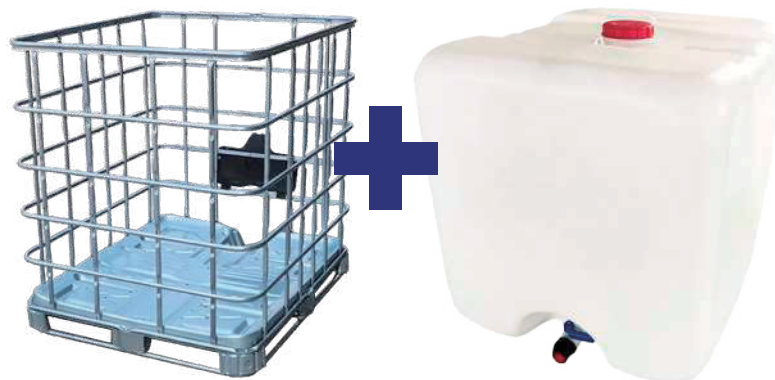

For semi-finished products, new liners are used with recycled steel frames. Compared to the standard model, this option offers a 30% cost-saving benefit. Please review the details and make your purchasing decision accordingly.

Caps Sealed & Air Vent Types



150A Sealed Type



225A Sealed Type

• Air vent type available

Accessories Coupling&Camlock



Camlock Reducer Coupling



Camlock Reducer Coupling



Camlock Adapter



Camlock Adapter

Valves Ball & Butterfly



50DN Ball Valve



50DN Butterfly Valve



80DN Butterfly Valve Camlock



50DN Ball Valve Camlock



3-inch Butterfly Valve



450A Large-Diameter IBC Tank

Weight	57(±5)KG
Capacity	Max Capacity: 1,050L Rated Capacity: 1,000L
Dimensions	Width X Length X Height 1000×1200×1145(±5)
Permit Approval	Food and Pharmaceutical Test Report
Pallet Types	Steel / Plastic
Specific Gravity	1.9

Liner Selection

• UV Blocking Ratio Varies



Basic Model
(Original Color)
[Specific Gravity 1.9]



White(90% UV Protection)
[Specific Gravity 1.5]



Black(90% UV Protection)
[Specific Gravity 1.5]

Accessories Coupling&Camlock



Camlock
Reducer
Coupling



Camlock
Reducer
Coupling



Camlock
Adapter



Camlock
Adapter

Valves Ball & Butterfly



50DN
Ball Valve



50DN
Butterfly Valve



80DN
Butterfly Valve Camlock



50DN
Ball Valve Camlock



3-inch
Butterfly Valve



650A Large-Diameter IBC Tank

Weight	57(±5)KG
Capacity	Max Capacity: 1,050L Rated Capacity: 1,000L
Dimensions	Width X Length X Height 1000×1200×1145(±5)
Permit Approval	Food and Pharmaceutical Test Report
Pallet Types	Steel
Specific Gravity	1.9

Liner Selection

• UV Blocking Ratio Varies



Basic Model
(Original Color)
[Specific Gravity 1.9]



White(90% UV Protection)
[Specific Gravity 1.5]



Black(90% UV Protection)
[Specific Gravity 1.5]

Accessories Coupling&Camlock



Camlock
Reducer
Coupling



Camlock
Reducer
Coupling



Camlock
Adapter



Camlock
Adapter

Valves Ball & Butterfly



50DN
Ball Valve



50DN
Butterfly Valve



80DN
Butterfly Valve Camlock



50DN
Ball Valve Camlock



3-inch
Butterfly Valve



Paper IBC Tank

Weight	48(±1)KG
Capacity	1,000L
Dimensions	Width X Length X Height 1000×1100×1000
Permit Approval	-
Pallet Types	Wood / Plastic
Specific Gravity	-

Paper IBC can replace traditional wooden boxes, steel boxes, and container barrels. It is made of 100% corrugated paper, making it eco-friendly, easy to recycle, lightweight, and foldable for convenient storage and transport.

Product Advantages

01 | Low Cost and High Efficiency

Maximizes container space, allowing 20 boxes (20 tons) to be loaded into a 20ft container. Provides 25% higher loading capacity compared to drum containers (16 tons).

02 | Efficient and Convenient

Can be assembled by one person in just one minute. Filling is possible without special equipment or training, offering both efficiency and convenience.


03 | Strong Durability & Solid Structure

The paper IBC tank can withstand over 8 tons (8,000kg) of weight. It supports three-tier stacking, proving its strength and maximizing storage efficiency.

04 | Optimized for Space Saving

Provides 20-25% more loading capacity than steel drums or plastic buckets. Reduces logistics costs by 20-25%, and saves over 80% of storage space with easy folding and storage.



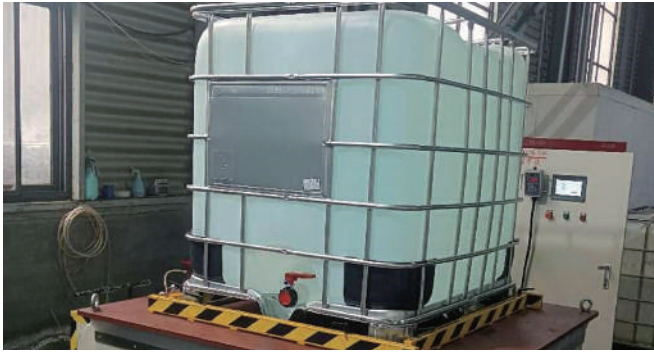

Is it resistant to vibration?

Vibration Test

Fill the IBC tank up to 98% of its maximum capacity with water and place it at the center of the testing bench. If there is no leakage, bursting, or damage to structural components, the product is considered qualified.



How durable is it?

Lifting from the bottom

Fill the IBC tank with water (1,000L) and add supplemental weight up to 125% of the maximum allowable gross mass. If there is no leakage of contents and no permanent deformation that affects safe transportation, the product is considered qualified.



Is it safe for stacking?

Stacking Load

Place the IBC tank on a flat surface and proceed with stacking during transport. If there is no leakage, and no deformation to the intermediate bulk container, including the contents and the bottom pallet, the product is considered qualified.



Is it resistant to pressure?

Leakage Test

Close the vent, pressurize the container to 20 kPa using a compressor, and spray soapy water on the surface. Maintain the pressure for 10 minutes. If no bubbles form on the surface, the container is considered qualified.



How much water pressure can it withstand?

Water Pressure Test

Close the pressure relief device, fill the container with water, and connect a pressure gauge to a pressure pump. Maintain a pressure of 100kPa for 10 minutes. If there is no leakage or deformation, the container is considered qualified.



Is it safe if dropped?

Drop Test

Fill the IBC to 98% of its capacity, add antifreeze, and subject it to low-temperature treatment at -18°C. Drop the container from a height of 1.9 meters. If there is no leakage of contents after the impact, the container is considered qualified.



Upcoming Products

FLEXIBAG
STEEL DRUMS
PE DRUMS





FLEXIBAG

Installed inside a standard container and used for transporting non-hazardous liquid cargo.

Weight	50 kg (110 kg with all components attached)
Capacity	10,000 - 24,000L
Dimensions	Complies with industrial container box standards.
Material	High-strength woven polypropylene High-strength co-extruded LLDPE film
Options	Materials available with protection against oxygen and odors



Product Overview

Brief Introduction

- Suitable for transporting 10,000 to 24,000 liters
- Capable of top loading and unloading, bottom loading and unloading, or a combination of top loading and bottom unloading
- Used for transporting various non-hazardous liquid food products and chemicals
- 100% loading capacity for food-grade products

Product Strengths

Reasons to Use the Product

- Manufactured using seamless PE film to reduce the number of joints
- Compatible with an automatic pressure relief valve (PRV)
- 1-bar pressure test conducted on joint areas to ensure durability
- 100% recyclable and convenient for cleanup after unloading
- Designed for easy installation inside containers with adjustable and customizable valve positions
- Equipped with a corrugated and metal bar bulkhead system
- Offers the additional benefit of bathtub-shaped lining compatibility

UPCOMING DRUM PRODUCTS

Steel drums, PE drums, and more are scheduled for arrival



PE DRUMS



**PE OPEN TYPE
DRUMS**



STEEL DRUMS



**STEEL OPEN TYPE
DRUMS**

PE OPEN TYPE DRUMS

Currently Scheduled for Arrival



**Sealed Type
30L**



**Sealed Type
60L**



**Sealed Type
120L**



**Sealed Type
160L**



**Sealed Type
200L**



1205 Geumgwan-daero, Gimhae-si
Gyeongsangnam-do, South Korea
ibctankcorporation@naver.com



Whatsapp



KAKAO · LINE · WECHAT
[ibctankcorporation](#)